


PHYSICAL SPECIFICATION

Nominal Voltage Nominal Capacity(10HR)		12V 34AH
Dimension	Length	196±2mm (7.72inches)
	Width	130±2mm (5.12 inches)
	Container Height	155±2mm (6.10 inches)
	Total Height	179±2mm (7.05inches)
Weight		Approx 11.5Kg (25.3 lbs)
Standard Terminal		B3(Bolt & nuts Terminal) Bolt Type: M5

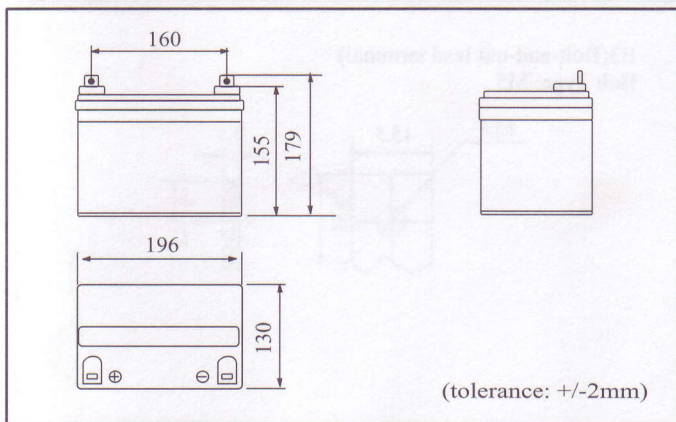


6GFM34(12V34AH)

Major Application(s): Electric wheelchair etc.




B3 (Bolt-and-nut lead terminal)
Bolt Type: M5



ELECTRICAL SPECIFICATION

Capacity	20 hour rate(1.7A)	35.7Ah	It is recommended to use constant-voltage charge and recharge immediately after use	
	10 hour rate(3.4A)	34Ah		
Capacity affected by temperature	5 hour rate(5.8A)	29Ah	Constant-Voltage Charge	Cycle
	3 hour rate(8.5A)	25.5Ah		Initial Charging Current less than 8.5A Voltage 14.1V-14.4V at 25°C (77°F) Temperature Coefficient -18mV/°C
	1hour rate(20.4A)	20.4Ah	Standby	No limit on Initial Charging Current Voltage 13.5V-13.8V at 25°C (77°F) Temperature Coefficient -18mV/°C
Internal Resistance	Fully charged battery(25°C, 77°F)9mΩ			

Discharge Characteristics(25°C, 77°F)

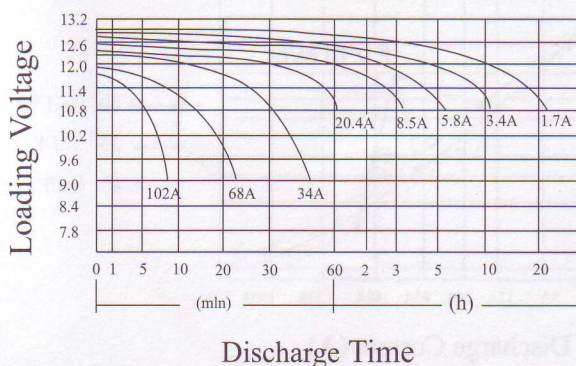

Discharge Current & Discharge Duration Time

